


types overview
FM-0290

Moto

Frank Sitzmöbel GmbH - Grafenheider Straße 20 - D-33729 Bielefeld
Tel +49 (0) 521 / 164 60-0 Fax -19

www.frank-sitzmoebel.de | info@frank-sitzmoebel.de

MOTO

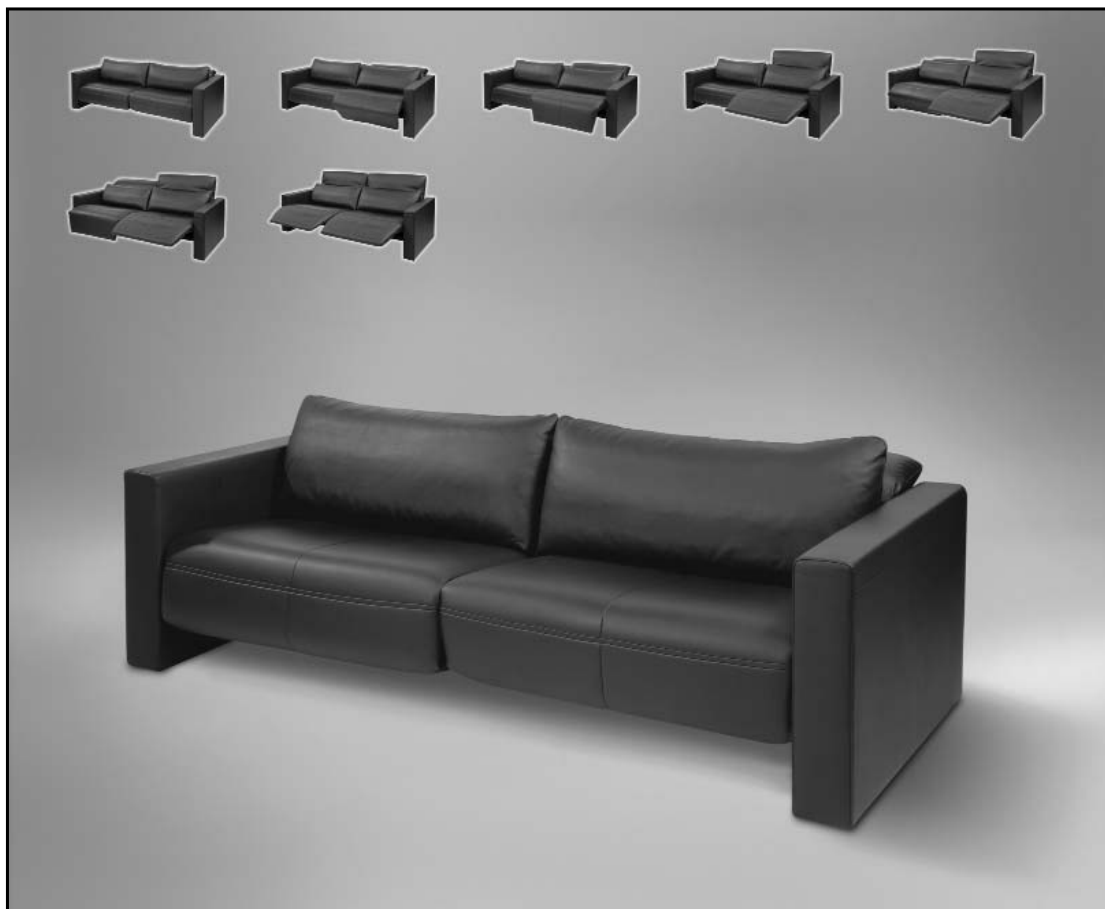

Model description

Design: Georg Appeltshauser

Function: four linear motors per seat unit for individual adjustment of the seating position. The seat and back angle, seat and back height, headrest position and the footrest can all be adjusted separately using a control element stored, out of sight, in the side section next to the back cushion. Your three favourite positions can be programmed using the control element at any time; they are set using three memory keys that are integrated in the side section. A reset key in the same area will return the sofa to the original position.

Mechanism: electrically adjustable functions fitting with maintenance-free bearings.

Technical details: integrated mains unit 230/24 volt with safety plug, four 24-v linear motors per seat unit, one each funk control element con-

cealed behind the back cushion, and four memory keys integrated, out of sight, in the arm section.

Frame: seat made of welded steel profile.


Upholstery: seat and headrest in a multilayered comfort foam construction.

Seat springs: crosswise woven elastic straps.

Safety: please avoid applying too much weight to the footrest or backrest while the chair is in the relax position. The footrest is designed for supporting the feet and is suitable for weights of up to 30 kg. Please note that the sofa is designed for a maximum weight of 120 kg per seat unit.

Transportation: the sofa separates for easy transportation with little effort.

MOTO

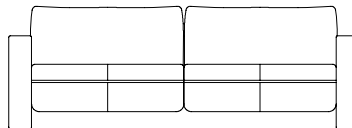


MODEL	SO 230 Sofa FM-0290/24 Sofa with function left and right Please consider a minimum distance of 20 cm to wall in the retracted status if not standing free in the room	SO 230 Sofa FM-0290/04 Sofa without function (cannot be added later)
SIZES IN CM		
Width	230	230
Depth	100/187	100
Height	81 max. 100	81
Special height		
Seating depth	56 max. 105	56
Seating height	43	43
Special Seating height	46	46
Armrest height	62	62
FABRIC/LEATHER		
Front raw edge, rm/140	11,90	10,90
Front selvedge, rm/140	13,20	10,00
Leather sqm	25,00	18,50
Customer's own fabric*		
Customer's own leather*		
(*See page 6)		
Fabric Price Group 05		
07		
12		
14		
15		
Microsede Col Cht. 16		
19		
Leather Price Group F		
A/O		
K		
N		
Requested Leather col. W***		
*** Description p. 95		

ORDER INFORMATION

Seating height: standard 43 cm
special Seating height 46 cm

Wireless socket: available as an accessory **FM-0290/80 wireless socket** **Price per item:**
(single socket: nominal output 850W / max. 230 V~ / 50 – 60 Hz / 4A). Appliances plugged
in (lamps, TV, HiFi, etc.) can be easily switched on and off using the supplied remote control.



**SO 190 Sofa
FM-0290/23
Sofa with function
left and right**


Please consider a minimum distance of 20 cm to wall in the retracted status if not standing free in the room

**SO 190 Sofa
FM-0290/03
Sofa without function
(cannot be added later)**


190	190
100/187	100
81 max. 100	81
56 max. 105	56
43	43
46	46
62	62
10,20	7,70
11,00	8,00
21,00	16,00
05	
07	
12	
14	
15	
16	
19	
F	
A/O	
K	
N	
W***	

Cushion padding


Back cushion

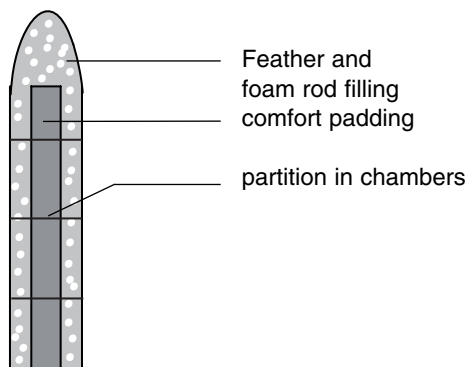

With fell seam

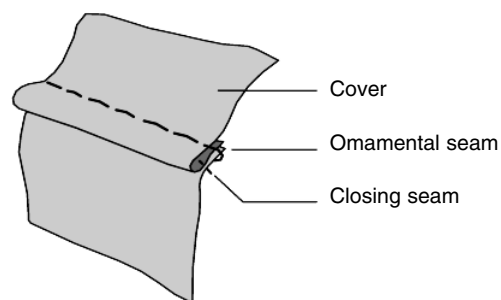


Heading section

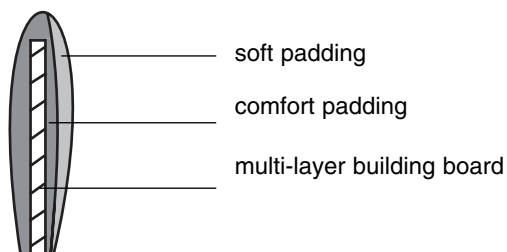

We do not process velours.

We use comfort Bultex in different strengths and weights by volume for our high-quality padding. They exceed RAL requirements by far.

Seat cushion

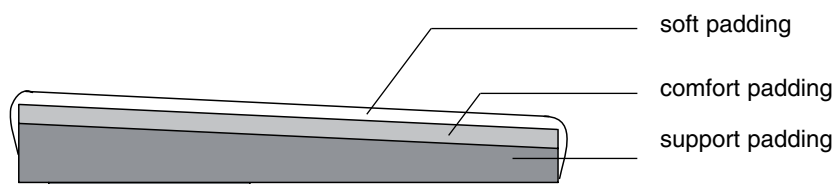

Environmental balance

Frame: The steel construction is untreated.
Padding: The polyurethane foam used is produced with water vapour and is CFC-free.
Adhesives: Most of the adhesives are water-based products. For complex bonds, we now use adhesives containing reduced amounts of solvent.

Mechanical design: The mechanism is screwed together and can be separated. It has a solvent-free KTL varnish.
Leather covers: The dyes in our shagreen are free from solvent on completion of the production process. Since 1985, FSM has processed leather with reduced chrome content which is free from solvents. This exceeds German environmental standards.